


Hyperion™

Orbit-V Delivery System

for VSDO, PDAO and Vascular Plug

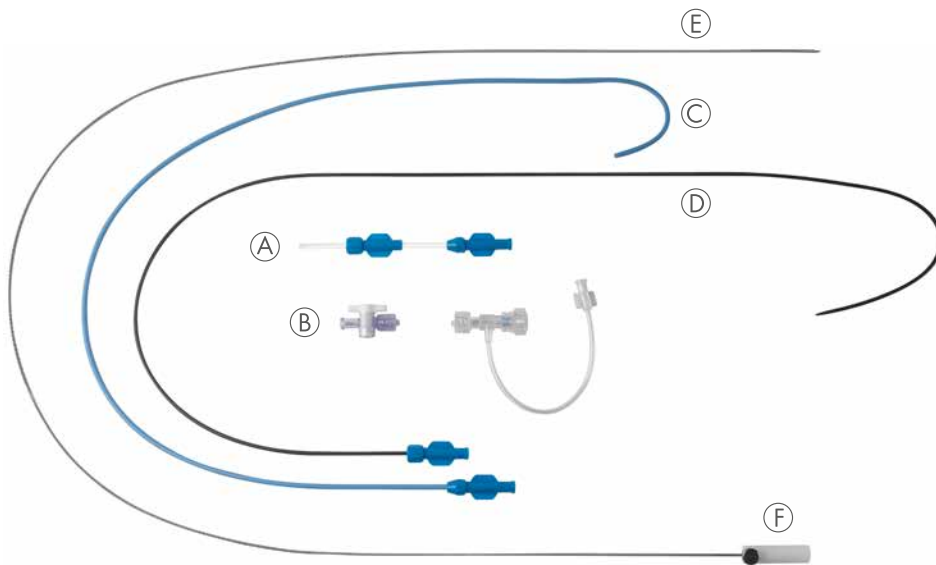

Product Information

Features

- Pre-curved PTFE sheath
- PTFE dilator
- Transparent loader
- Wide size ID / Small size OD
- Pusher cable with screw connection


Sizing

- 5 sizes
- Ø 6 to 10 F
- Pre-shaped angle: 180°
- Length sheath: 80 cm
- Length pusher: 120 cm

Benefits

- Easy positioning
- Shapeable shaft
- No friction (occluder device)
- Safe attachment/detachment

- Ⓐ : Loader
- Ⓑ : Y-Connector with tubing
- Ⓒ : Pre-shaped Sheath
- Ⓓ : Dilator
- Ⓔ : Pusher Cable
- Ⓕ : Removable torque device

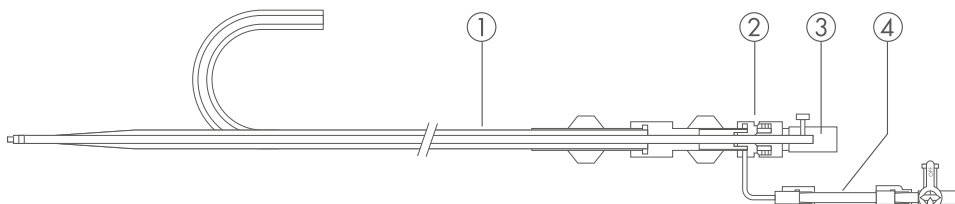

- ① : Pre-shaped Sheath
- ② : Dilator
- ③ : Pusher Cable with torque device
- ④ : Y-Connector with tubing

Ordering Information / Technical Specification

Hyperion™ Orbit-V Delivery System

ONLY FOR USE WITH VSDO, PDAO AND VASCULAR PLUG

Catalogue #		C-DS-P/V-6F	C-DS-P/V-7F	C-DS-P/V-8F	C-DS-P/V-9F	C-DS-P/V-10F
Loader	ID (F/mm/Inch)	6/2.2/0.087	7/2.5/0.089	8/2.77/0.104	9/3.08/0.121	10/3.38/0.133
	Length (cm)	11	11	11	11	11
Sheath	ID (F/mm/Inch)	6/2.2/0.087	7/2.5/0.089	8/2.77/0.104	9/3.08/0.121	10/3.38/0.133
	Useable Length (cm)	80	80	80	80	80
	OD (mm)	2.76	3.06	3.37	3.74	4.04
	Angle°	180	180	180	180	180
Dilator	OD (F/mm)	6/2.2	7/2.5	8/2.77	9/3.08	10/3.38
	Useable Length (cm)	92	92	92	92	92
Pusher	Diameter (mm/inch)	1.6/0.063	1.8/0.071	1.8/0.071	1.8/0.071	1.9/0.075
	Length (cm)	120	120	120	120	120

- ① : Pre-shaped Sheath
- ② : Dilator
- ③ : Pusher Cable with torque device
- ④ : Y-connector with tubing

